

WINDOW FAN



Wind 150



Automatic shutters
"Open" position

■ Application

- Blauberg Wind is designed for mounting through a vertical glass window for the extraction of air from bathrooms, kitchens, ensuites, toilets, laundries, apartments etc.

■ Design

- Vertical glass mounted, low noise and automatic back draft shutters.

■ Motor

- 220 – 240V single phase at 50Hz. All motors have a sealed ball bearing and come fitted with thermal overload protection fuse that cannot be replaced.


■ Wiring

- Hard wired.

■ Ordering Information


Part Number	Description
BLAWIND150	150mm Standard Window Fan

■ Overall and installation dimensions

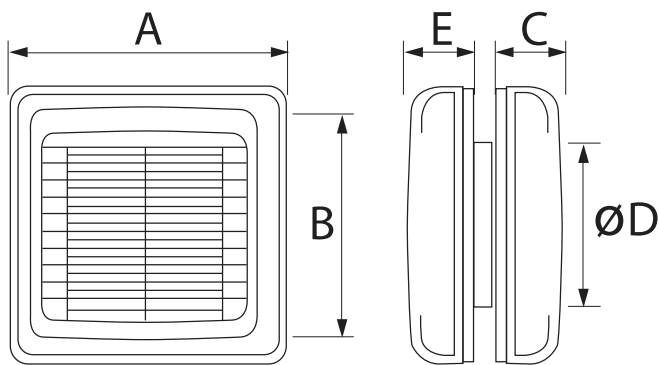

Model Number	Dimensions mm				
	A	B	C	ØD	E
BLAWIND150	210	195	60	150	66

■ Specifications

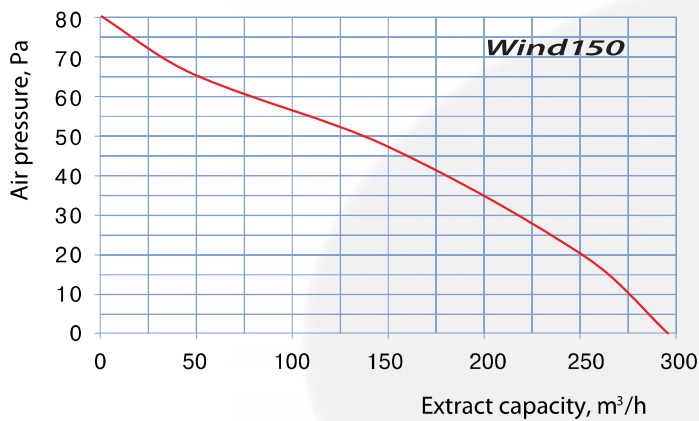

Parameters	Wind 150
Voltage AC	220-240
Power, W	26
Extract capacity, m³/h	295
Noise level, dBA 3m	41
r.p.m	2400
Installation type	Surface
Installation site	Glass
Installation position	Vertical
DN (diameter nominal mm)	150
Air flow temperature (°C)	-20 to +45
Index of protection	IP24
Casting material	ABS plastic
Front panel material	ABS plastic
Impeller material	ABS plastic
Colour	White

■ Safety regulations

