


NF800-CEW NF800-SEW NF800-HEW NF800-REW




NF800-SEW

Model			NF800-CEW	NF800-SEW	NF800-HEW	NF800-REW
Rated current In (A)			400-800 adjustable			
Number of poles			3	3	4	3
Rated insulation voltage Ui (V)			690	690	690	690
Rated short-circuit breaking capacity (kA)	IEC 60947-2 (Icu/Ics)	AC	690V	—	10/10	15/15
			500V	18/9	30/30	50/50
			440V	36/18	42/42	65/65
			400V	36/18	50/50	70/70
			230V	50/25	85/85	100/100
Standard attached parts (4-pole models are provided with auxiliary handle.)		Front connection	Mounting screw: M6×35 (4pcs) Insulating barrier: (3P: 2pcs, 4P: 3pcs)			
		Rear connection	Mounting screw: M6×40 (4pcs)			


Operating Characteristics

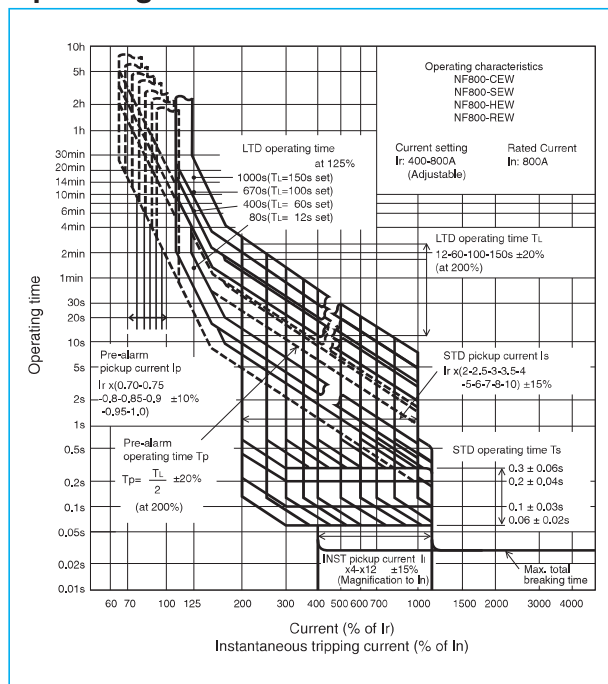

Internal Accessories

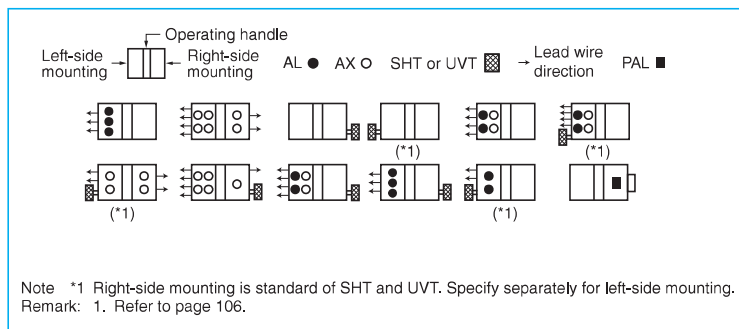

Current Reducing Curve

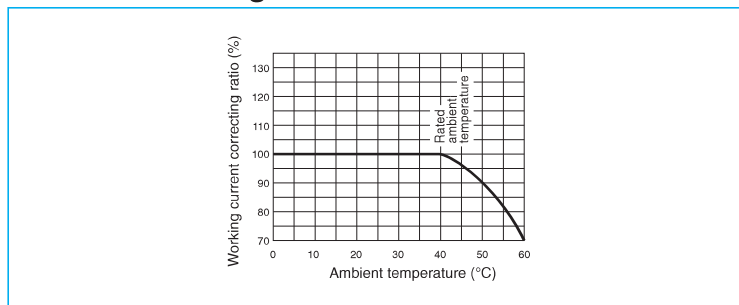


External Accessories

Accessories	Type name	Reference page	Accessories	Type name	Reference page
Operating handle	F	F-8S	Terminal cover	Large	123
	V	V-8S		TC-L	
Mechanical interlock	MI	MI-8SW3		3P	
	MI	MI-8SW4		4P	
Auxiliary handle	HT	HT-4SW	Skeleton	TTC	123
	HT	HT-4SW		3P	
Rear	BTC	BTC-8SW3	Rear	BTC	123
	BTC	BTC-8SW4		4P	
Handle lock device	HL	HL-4SW	Handle lock device	HL	129
	HL-S	HLS-8SW		HL-S	
Electrical operation device	NFM	(*)	Electrical operation device	NFM	135
	4P	(*)		4P	


Note *1 Specify the operation method and voltage. Order in combination with the breaker unit.

Outline Drawing

Front connection

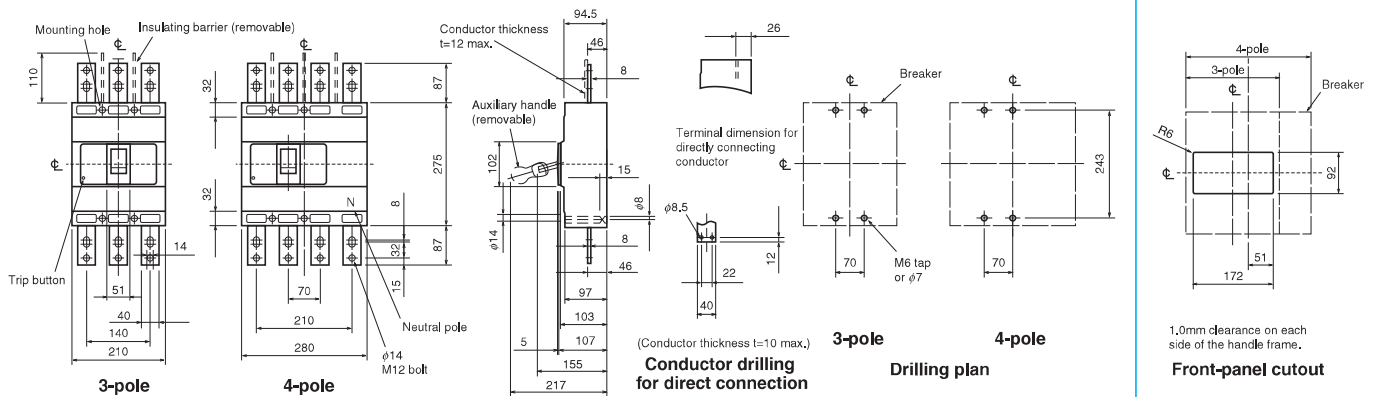

Rear connection

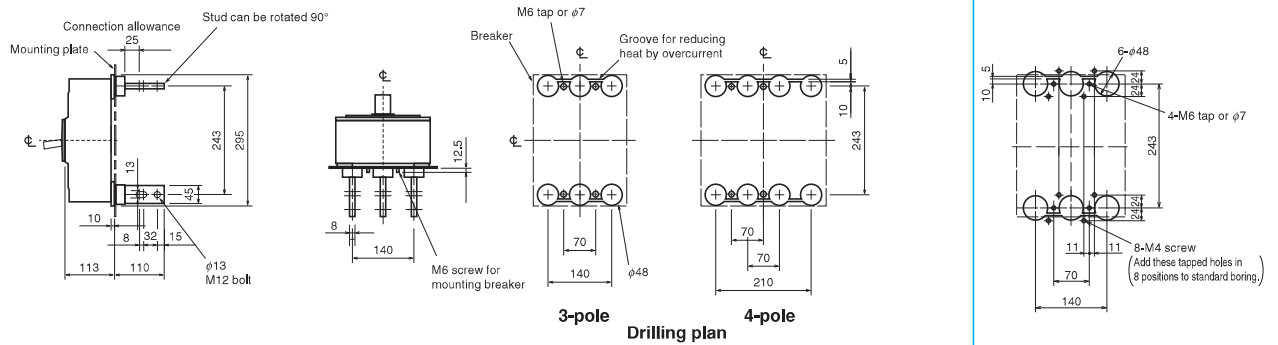

Plug-in

