


NEW

POWERFORCE™

Metal Cable Ties

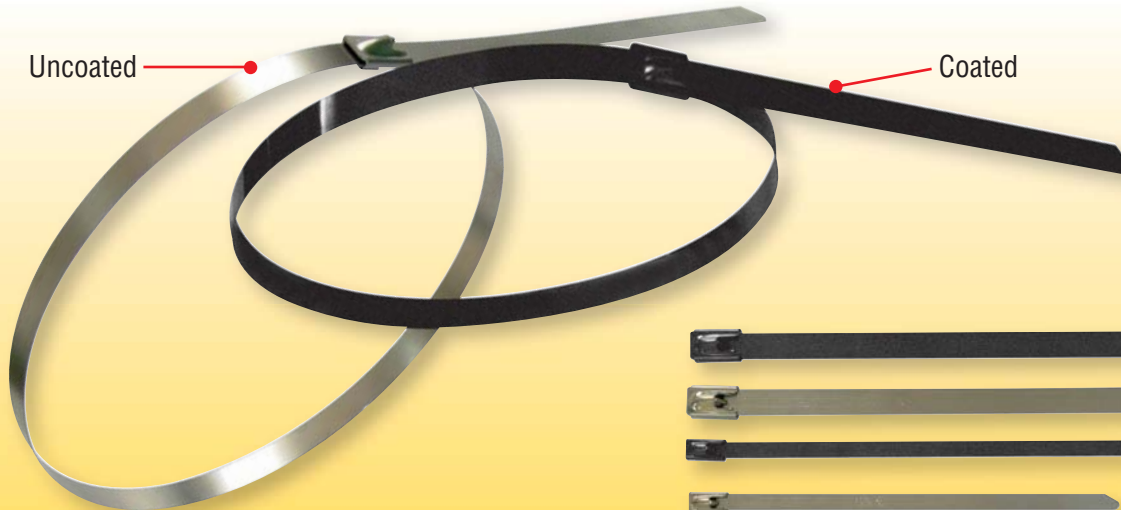

Uncoated Features

- Made from AISI 316 grade SS316
- Self locking ball-lock design
- Temp range: -80°C to +500°C
- Fire resistant, UV resistant
- Weather, water, salt spray & corrosion resistant
- Non-magnetic
- ROHS compliant according to EU directive

Coated Features

- Made from AISI 316 grade SS316
- Self locking ball-lock design
- Epoxy & pure polyester coating
- Smooth black surface finish
- Temp range: -80°C to +150°C
- Chemical, corrosion, salt spray & UV resistant
- Halogen free & non-magnetic
- ROHS compliant according to EU directive

Stainless Steel Cable Tie Tensioner



- Automatically tensions and cuts cable ties in one operation
- Adjustable tension
- Suitable for stainless steel and coated ties up to 8.0mm wide

See over for specs ►

☎ 1300 555 586
🌐 repelec.com.au

rep **ELEC**
TRADE SOLUTIONS

Facebook Instagram
Twitter YouTube @RepelecAU

Metal Cable Ties

Specifications

Part No.	Length (mm)	Width (mm)	Thickness (mm)	Max. Dia. Single Loop (mm)	Min. Loop Tensile Strength (N)		Pack Qty (Pieces)
					N	Kgs	
Uncoated							
POWCTSS2004/100	200	4.6	0.24	59	667	68	100
POWCTSS3004/100	300	4.6	0.24	90	667	68	100
POWCTSS3604/100	360	4.6	0.24	110	667	68	100
POWCTSS5204/100	520	4.6	0.24	161	667	68	100
POWCTSS2008/50	200	7.9	0.24	59	1335	136	50
POWCTSS3008/50	300	7.9	0.24	90	1335	136	50
POWCTSS3608/50	360	7.9	0.24	110	1335	136	50
POWCTSS5208/50	520	7.9	0.24	161	1335	136	50
Coated							
POWCTSSC2004/100	200	4.6	0.24	59	667	68	100
POWCTSSC3004/100	300	4.6	0.24	90	667	68	100
POWCTSSC3604/100	360	4.6	0.24	110	667	68	100
POWCTSSC5204/100	520	4.6	0.24	161	667	68	100
POWCTSSC2008/50	200	7.9	0.24	59	1335	136	50
POWCTSSC3008/50	300	7.9	0.24	90	1335	136	50
POWCTSSC3608/50	360	7.9	0.24	110	1335	136	50
POWCTSSC5208/50	520	7.9	0.24	161	1335	136	50

Part No.	Description
POWCTSS2004/100	Cable Tie, Stainless Steel, 200mm x 4.6mm [100] Pack
POWCTSS3004/100	Cable Tie, Stainless Steel, 300mm x 4.6mm [100] Pack
POWCTSS3604/100	Cable Tie, Stainless Steel, 360mm x 4.6mm [100] Pack
POWCTSS5204/100	Cable Tie, Stainless Steel, 520mm x 4.6mm [100] Pack
POWCTSS2008/50	Cable Tie, Stainless Steel, 200mm x 7.9mm [50] Pack
POWCTSS3008/50	Cable Tie, Stainless Steel, 300mm x 7.9mm [50] Pack
POWCTSS3608/50	Cable Tie, Stainless Steel, 360mm x 7.9mm [50] Pack
POWCTSS5208/50	Cable Tie, Stainless Steel, 520mm x 7.9mm [50] Pack
POWCTSSC2004/100	Cable Tie, Stainless Steel Coated, 200mm x 4.6mm [100] Pack
POWCTSSC3004/100	Cable Tie, Stainless Steel Coated, 300mm x 4.6mm [100] Pack
POWCTSSC3604/100	Cable Tie, Stainless Steel Coated, 360mm x 4.6mm [100] Pack
POWCTSSC5204/100	Cable Tie, Stainless Steel Coated, 520mm x 4.6mm [100] Pack
POWCTSSC2008/50	Cable Tie, Stainless Steel Coated, 200mm x 7.9mm [50] Pack
POWCTSSC3008/50	Cable Tie, Stainless Steel Coated, 300mm x 7.9mm [50] Pack
POWCTSSC3608/50	Cable Tie, Stainless Steel Coated, 360mm x 7.9mm [50] Pack
POWCTSSC5208/50	Cable Tie, Stainless Steel Coated, 520mm x 7.9mm [50] Pack
POWSSCTG	Cable Tie Tensioner Tool for SS & Coated Ties