

SURESET METAL ROOF PEELER

The safest way to fold back metal sheet when gaining access to ceiling space



The old way of holding up sheets



Safely peel back metal roof sheeting




holds roof sheet back for safe access



Contoured to avoid damage



All components connected

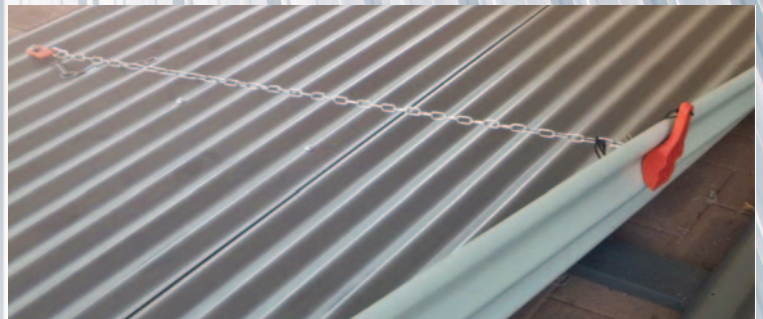

Holds sheets in place

Features

- Made from 25% glass filled nylon
- All components are 'connected'- no losing parts
- Metal components are stainless steel
- 1.5m length of stainless steel chain
- Comes with a cotton bag to store the screws
- Designed and assembled in Australia

See over for instructions

Part No.	Description
SURMRPEELER	Roofing Sheet Lifter & Brace

1300 555 586
repelec.com.au



Facebook, Instagram, Twitter, YouTube icons
@RepelecAU

SURESET METAL ROOF PEELER



INSTRUCTIONS FOR USE

1




After removing sufficient roof screws, unpack your MR PEELER.
Note: the bag can be used to store the roof screws.

2



Insert the stainless steel bolt through the best positioned screw hole and attach the 'Lifting Ring'.
Note: 'best position' is dependant on the situation.

3

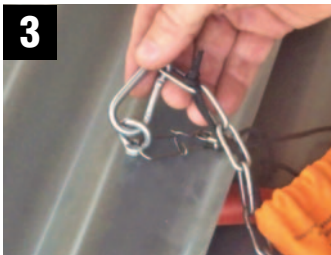

Once the lifting ring is secure, attach the 'Snap Lock hook'.

4




Using the chain, pull back firmly to 'peel' back the roofing sheet, being cautious not to overbend and cause a kink in the sheet.

5



Select an appropriate roofing screw and back off partially, to allow the 'Fixing Plate' to slide over the head of the roofing screw.

6

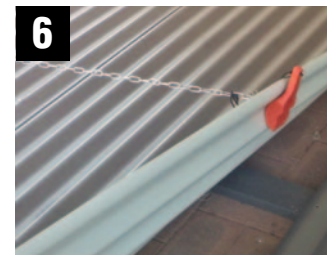

Once the fixing plate is in place, adjustment may be necessary to shorten the chain to suit the application. You now have safe access to the ceiling space.