

# TRADE\$AVE

## Backlit LED Flat Panel

**NEW**



### Features

- Uniform light effect with optic lens
- Integrated sheet metal design provides excellent thermal management
- Slide switch function for colour temperature change
- Constant current driver
- 0.6m flex & plug
- Operating temp: -20°C to +45°C
- IP40 rated


### Dimming Options (Driver Part# TSDRFP)

- Trailing & leading edge
- Universal

### Installation Options

- Pendant
- Recessed

CERTIFICATION	IP RATING	DIMMABLE
COLOUR CHANGE	BOX   CTN QTY	
	<b>115</b>	

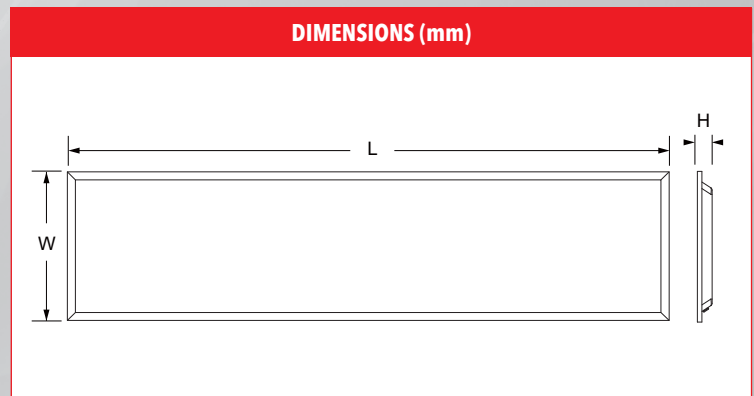

Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (W x L x H)mm
TSPFBL30120TRI	200-240V	36W	0.9	3000K-4000K-5700K	80	3240-3600	120°	50,000	White	295 x 1195 x 28

**1300 555 586**  
**repelec.com.au**



**@RepelecAU**