# KNOCK-IT

#### THE SPECIFICS

The range consists of a pre-determined length of wire from 1 metre to 10 metres with a choice of Safe Working Load:

- G 10kg SWL
- S 35kg SWL

The system consists of wire and zip-clip with a purlin fixing termination.

#### THE APPLICATIONS

Knock onto purlin Suitable for:

- Lighting
- Plenum boxes
- Chilled Beams
- Radiant heat panels
- Metal cladding
- Thin tin roofs
- Cable tray
- Accoustic boards

### THE TECHNICAL INFORMATION

- Key free release system
- Available with both 1-5mm and 5-7mm purlin clips as standard
- Other hangers available on request
- High tensile galvanised wire 1960N/mm² grade 7 x 7 construction
- BSEN 12385 standard

### THE INSTALLATION

- Hook purlin clip over the lip of the purlin. Strike with hammer to ensure a secure fixing.
- Pass the wire through the zip-clip in the direction of the arrow.
- Pass through or around your required suspension and back through the zip-clip leaving 15cm of wire protruding.
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrow's indicated






## THE RANGE

The system consists of wire and zip-clip with a purlin fixing termination.



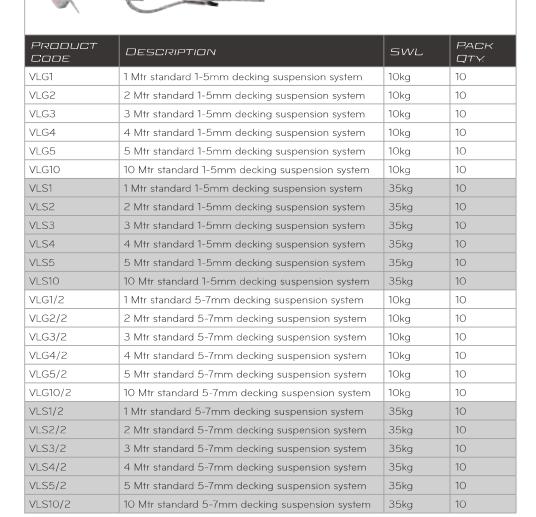

5 to 7mm available on request.

Please ensure the loadings are within the purlin manufacturers guidelines.

If a higher loading is required please refer to our wrap around systems.

Not all sizes in stock.

