

TRY-LOCK



THE SPECIFICS

The range consists of two pre-determined lengths of wire to support basket and tray with the following choice of Safe Working Loads:

- G 10kg (on request)
- S 50kg

Designed to be used in conjunction with Rize, Zip-Lock, Con-Lock, Dec-Lock, Shot-Lock and Uni-Lock

THE APPLICATIONS

Suitable for suspending containment and bracketry:



- Cable Basket
- Cable Tray
- Channel Supports
- Chilled Beams
- Radiant Heat Panels

THE TECHNICAL INFORMATION

- Reduces the use of studding and channel
- One fixing point per drop
- Allows for side loading
- Height can be adjusted at basket and not at fixing
- Can be fixed to basket at ground level
- Plastic protection sleeve preventing wire on wire friction
- 5 x 50 BZP carabiner hook
- Eyelets prevent accidental un-hooking of carabiner from wire
- High tensile galvanised wire 1960 N/mm² grade 7 x 7 construction
- BSEN 12385 Standard

THE INSTALLATION

- The attachment of the Try-Lock system can be done at ground level
- Clip the carabiner to one side of the basket or cable tray
- Clip the other carabiner to the other side of the basket or cable tray
- Pass the free end of the wire from your top suspension through the zip-clip in the direction of the arrow
- Pass through the plastic protected loop of the Try-Lock and back through the zip-clip leaving 15cm of wire protruding
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrows indicated
- Legs should not exceed 60 degrees

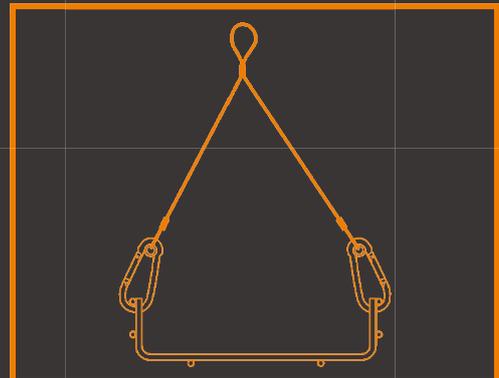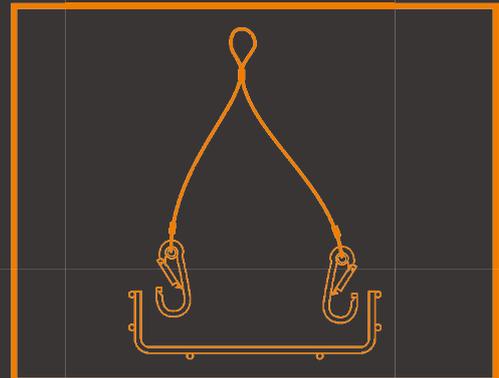

THE RANGE

Service support to be used in conjunction with RIZE, Zip-Lock, Con-Lock, Dec-Lock, Shot-Lock and Uni-Lock, reducing the use studding and channel




TRY-LOCK



PRODUCT CODE	DESCRIPTION	SWL	PACK QTY.
TRS50-200	Eyelet carabiner suspension system suitable for spans of 50-200mm	50kg	10
TRS300-400	Eyelet carabiner suspension system suitable for spans of 300-400mms	50kg	10

Not all sizes in stock.

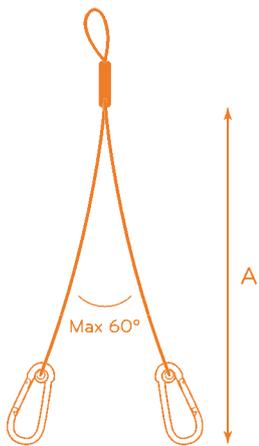

TRS50-200 A = 300mm
 TRS300-400 A = 460mm

