

# TRADE\$AVE

## LED Canopy Light

NEW









### ■ Features

- Aluminum housing powder coated white
- Tempered glass lens and polycarbonate cover
- Selectable wattage 36-75-100-120W
- Dip switch function for colour temp change
- Slim body design
- Constant current driver
- Surge protected 6kV Line-Line, 10kV Line-Earth
- High efficiency SMD chip 150Lm/w
- Operating temp: -30°C to +50°C
- IP65 rated at IK08 impact resistance

### ■ Installation Options

- Plug-in microwave or PIR sensor
- 501 x 491 x 17mm adaptor plate

<b>CERTIFICATION</b> 	<b>IP RATING</b> 	<b>NON-DIMMABLE</b> 
<b>COLOUR TEMP</b> 	<b>IK RATING</b>  1.7kg @ 300mm	<b>BOX   CTN QTY</b> <b>1   1</b>

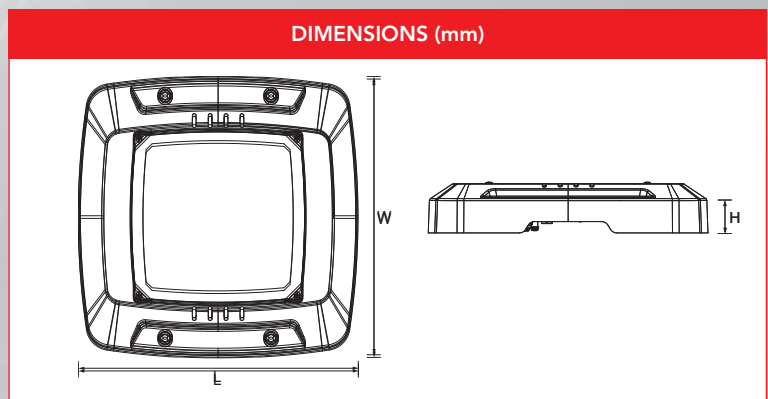

Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (L x W x H)mm	Weight
TSTSCP01	200-240V	36-120	0.95	3K-4K-5K	70	5400-11250-15000-18000	120	63,000	White	368 x 368 x 61	2.8kg

1300 555 586  
repelec.com.au



   
  @RepelecAU