

**LED Indoor
Battens with
Plug-in Sensor
For Ceilings & Walls**




Features

- Powder coated aluminium body with polycarbonate diffuser
- 20W/40W switchable wattage (1210mm only)
- Slide switch function for colour temp change
- High efficiency SMD chips
- Large terminal block and cable entry
- Operating temp: -10°C to +40°C
- IP20 rated

Installation Options (Plug in Microwave sensor)

- 5.8Ghz
- Operating voltage 5-12VDC
- 2sec-10min adjustable
- 15m detection range
- Standby light output adjustable from 0 - 50%
- 360 degree detection angle

| | | |
|----------------------|----------------------|-----------------|
| CERTIFICATION | IP RATING | DIMMABLE |
| | | |
| COLOUR CHANGE | BOX CTN QTY | |
| | 1 6 | |

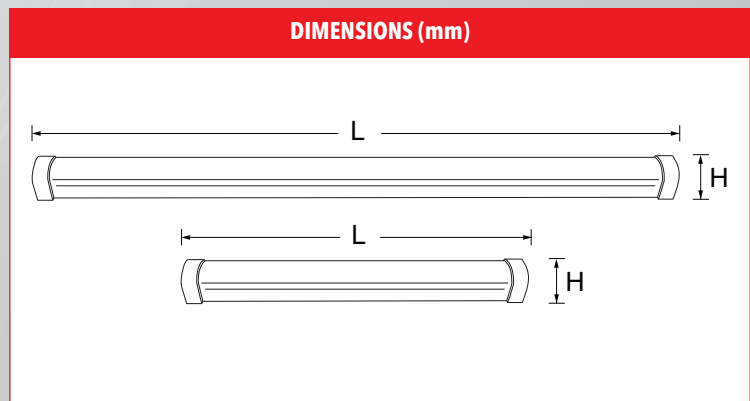

| Part No. | Voltage | Watt | PF | CCT | Ra | Lumens | Beam Angle | Lifetime hrs | Fitting Colour | Dimensions (L x W x H)mm |
|------------|---------|--------|------|-------------------|----|----------------|------------|--------------|----------------|--------------------------|
| TSAL8B1802 | 240V | 20/40W | >0.9 | 3000K-4000K-5700K | 80 | 3600-4000-3800 | 120° | 50,000 | White | 1210 x 75 x 65 |
| TSAL8B1803 | 240V | 20W | >0.9 | 3000K-4000K-5700K | 80 | 1800-2000-1900 | 120° | 50,000 | White | 650 x 75 x 65 |

| Part No. | Description | Colour | Dimensions |
|-----------|--------------------------|--------|----------------|
| TSAL8MSO1 | Microwave Sensor Plug-in | White | 34 x 75 x 37mm |