

SEW


10A Micro-Ohm Meter

NEW



Features

- Maximum testing current of 10A
- Ranges:
 - 200.0μΩ / 2000μΩ 10A
 - 20.00mΩ / 200.0mΩ 1A
 - 2.000Ω / 20.00Ω 100mA
 - 200.0Ω 10mA
- Maximum resolution of 0.1μΩ at 10A
- Four terminal measurement
- 4 Lines × 20 Characters LCD
- Memory function (200 measurement results)
- Auto power off
- Low battery indication
- Power source: Rechargeable battery DC14.8V 5200mAh 76.96Wh
- Safety Standard:
 - IEC/EN 61010-1 CAT III 300V
 - EN 61326-1

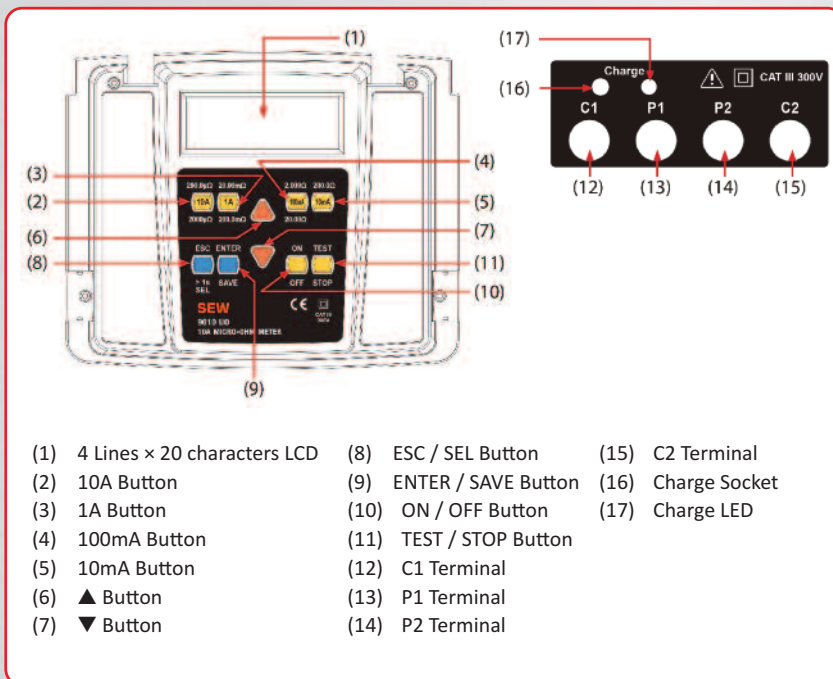

Measuring ranges / resolution	200.0μΩ / 0.1μΩ
	2000μΩ / 1μΩ
	20.00mΩ / 0.01mΩ
	200.0mΩ / 0.1mΩ
	2.000Ω / 1mΩ
Accuracy	200.0μΩ~2000μΩ: ±(2% + 8 dgt)
	20.00mΩ~200.0Ω: ±(1% + 4 dgt)
	10A: 200.0μΩ / 2000μΩ
	1A: 20.00mΩ / 200.0mΩ
	100mA: 2.000Ω / 20.00Ω
Testing current	10mA: 200.0Ω

Operating Temp	0~40°C
Operating Humidity	80% RH
Dimensions	322(L) × 260(W) × 135(D)mm
Weight	Approx. 3219g
Power source	Rechargeable battery DC14.8V 5200mAh 76.96Wh
Safety standard	IEC/EN 61010-1 CAT III 300V EN 61326-1
Accessories	Instruction manual, test leads, charger & shoulder belt

Part No.	Description
9010UO	Micro-Ohm Meter, 10A