

TRADE\$AVE

Weatherproof Oyster Light For Ceilings & Walls



Features


- Polycarbonate base & diffuser
- Slide switch function for colour temperature change
- High efficiency SMD chips
- Constant current driver
- Double insulated
- Large terminals for easy installation
- Operating temp: -20°C to +45°C
- IP54 rated

Dimming Options

- Trailing and leading edge
- Universal

**IPART
VEET
APPROVED**

CERTIFICATION	IP RATING	DIMMABLE
COLOUR CHANGE	DOUBLE INSULATED	BOX CTN QTY
		1 10

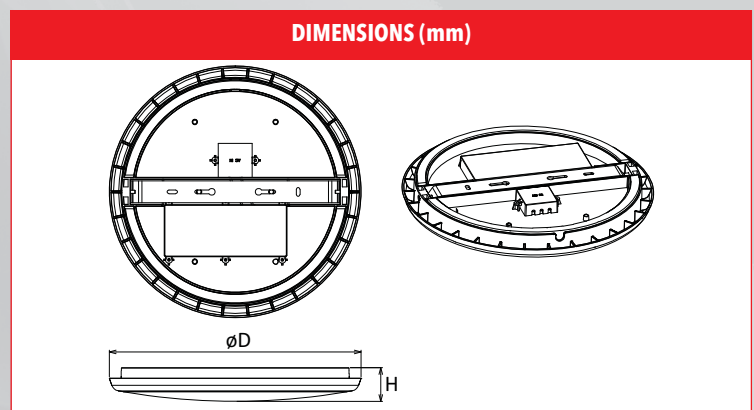

Part No.	Voltage	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (øD x H) mm
TSOYS18WTRI	200-240V	18W	0.9	3000K-4000K-5700K	80	1620-1890-1855	120°	40,000	White	300 x 40
TSOYS25WTRI	200-240V	25W	0.9	3000K-4000K-5700K	80	2480-2700-2610	120°	40,000	White	350 x 40

1300 555 586
repelec.com.au

rep ELEC
 TRADE SOLUTIONS

@RepelecAU