

TRADE\$AVE

Cyanosis Flat Panel For Ceilings




Features

- Ultra slim polystyrene diffuser
- Extruded aluminium frame
- High efficiency SMD chips
- Constant current flicker free driver
- 0.6m flex & plug
- Operating temp: -20°C to +45°C
- IP40 rated
- UGR19
- COI <3.3

Installation Options

- Recessed plaster ceiling installation (plaster frame is required)
- Surface mounted installation (surface mounted frame is required)
- Suspended (suspension kit is required)

CERTIFICATION	IP RATING	DIMMABLE
COLOUR TEMP	DOUBLE INSULATED	BOX CTN QTY
		1 5

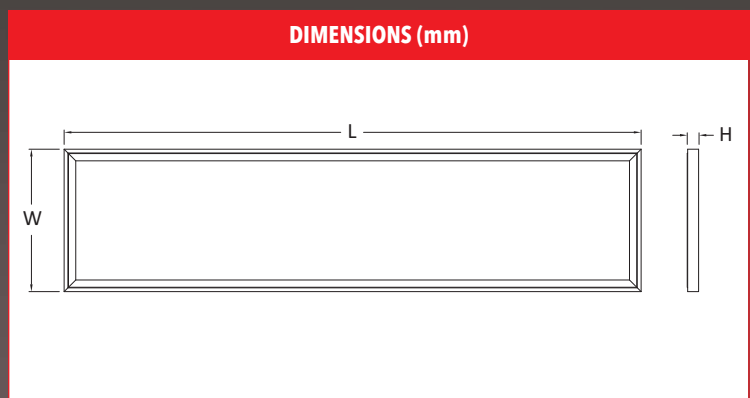

Part No.	Voltage	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (L x W x H)mm
TSFP301204KCYA	200-240V	38W	0.9	4000K	95	3600	90°	40,000	White	1195 x 295 x 10

1300 555 586
 repelec.com.au

rep ELEC
TRADE SOLUTIONS

@RepelecAU