

TRADE\$AVE

1200W LED Flood Light Remote Driver


NEW



Features

- Aluminium housing
- Tempered glass & polycarbonate optical lens
- Constant current driver
- Surge protected 20kV
- High efficiency SMD chip 140Lm/w
- Operating temp: -30°C to +50°C
- IP66 rated at IK08 impact resistance
- Dimmable DALI, DMX

CERTIFICATION	IP RATING	DIMMABLE
PROTECTION	IK RATING	BOX CTN QTY
	 IK8 1.7kg @ 300mm	1 1

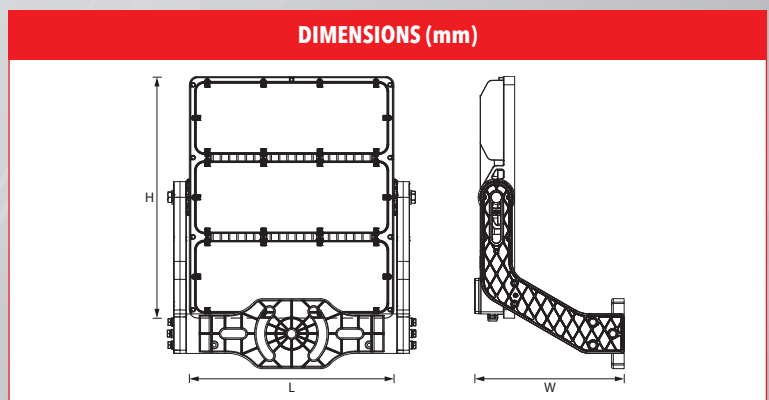

Part No.	Voltage AC 50/60Hz	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime L80 hrs	Fitting Colour	Dimensions (L x W x H)mm	Weight
TSFL28-1K2	100-240V	1200W	>0.92	5000K	70	168,000	F19813	111,000	Grey	597 x 356 x 825	40kg

Part No.	Description
TSFL28-1K2	LED 1200W Flood Light Remote Driver with 20m Cable

1300 555 586
repelec.com.au

rep ELEC
TRADE SOLUTIONS

Facebook Instagram Twitter YouTube
@RepelecAU