


# TRADE\$AVE

## LED Backlit Flat Panels

**IPART  
VEU  
APPROVED**

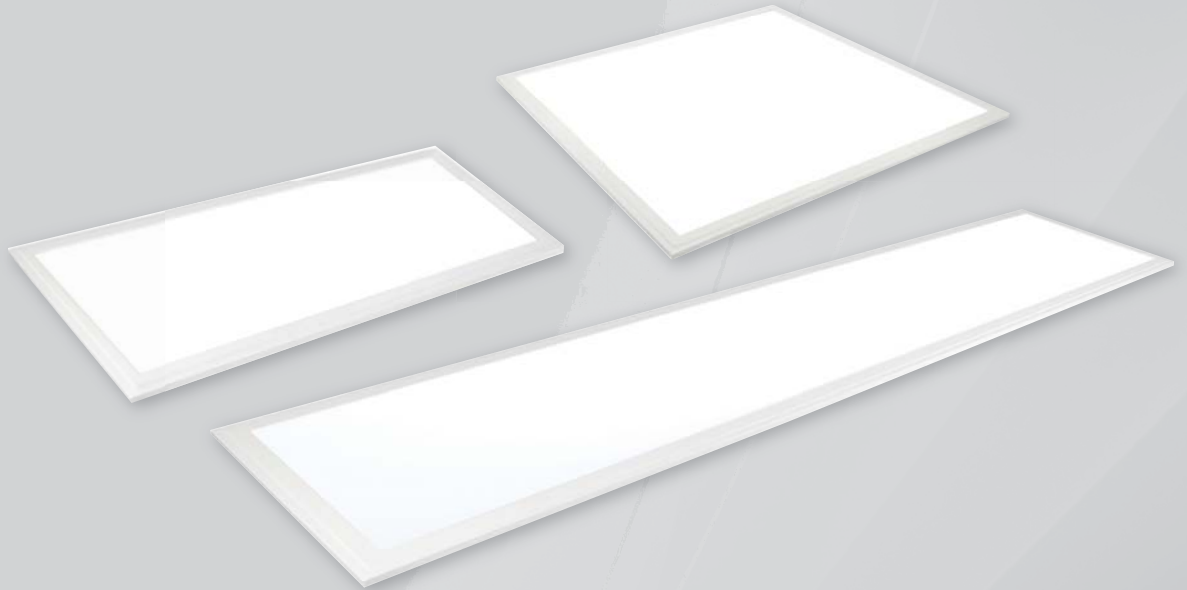

CERTIFICATION	IP RATING	DIMMABLE
COLOUR CHANGE	WARRANTY	BOX   CTN QTY
		<b>1   5</b>

### Features

- Uniform light effect with optic lens
- Integrated sheet metal design provides excellent thermal management
- Slide switch function for colour temperature change
- Constant current driver
- 0.6m flex & plug
- Operating temp: -20°C to +45°C
- IP20 rated

### Installation Options

- Pendant & recessed
- Installation

### Technical Specifications

	TSFPBL3060TRI	TSFPBL6060TRI	TSFBL30120TRI
<b>Wattage</b>	25W	36W	36W
<b>Lumens</b>	1977-2278-2280	3072-3627-3707	3072-3627-3707
<b>Colour Temp</b>	3000K-4000K-5700K	3000K-4000K-5700K	3000K-4000K-5700K
<b>Voltage</b>	200-240VAC 50Hz	200-240VAC 50Hz	200-240VAC 50Hz
<b>Beam Angle</b>	120°	120°	120°
<b>Ra</b>	80	80	80
<b>Colour</b>	White	White	White

Part No.	Description	Dimensions (L x W x H)mm
TSFPBL3060TRI	LED Backlit Flat Panel 25W Tricolour Non-Dim 295 x 595mm	295 x 595 x 25
TSFPBL6060TRI	LED Backlit Flat Panel 36W Tricolour Non-Dim 595 x 595mm	595 x 595 x 25
TSFPBL30120TRI	LED Backlit Flat Panel 36W Tricolour Non-Dim 295 x 1195mm	295 x 1195 x 25

See Over ►


**1300 555 586**  
**repelec.com.au**

*rep* **ELEC**  
**TRADE SOLUTIONS**



**@RepelecAU**

## LED Backlit Flat Panels

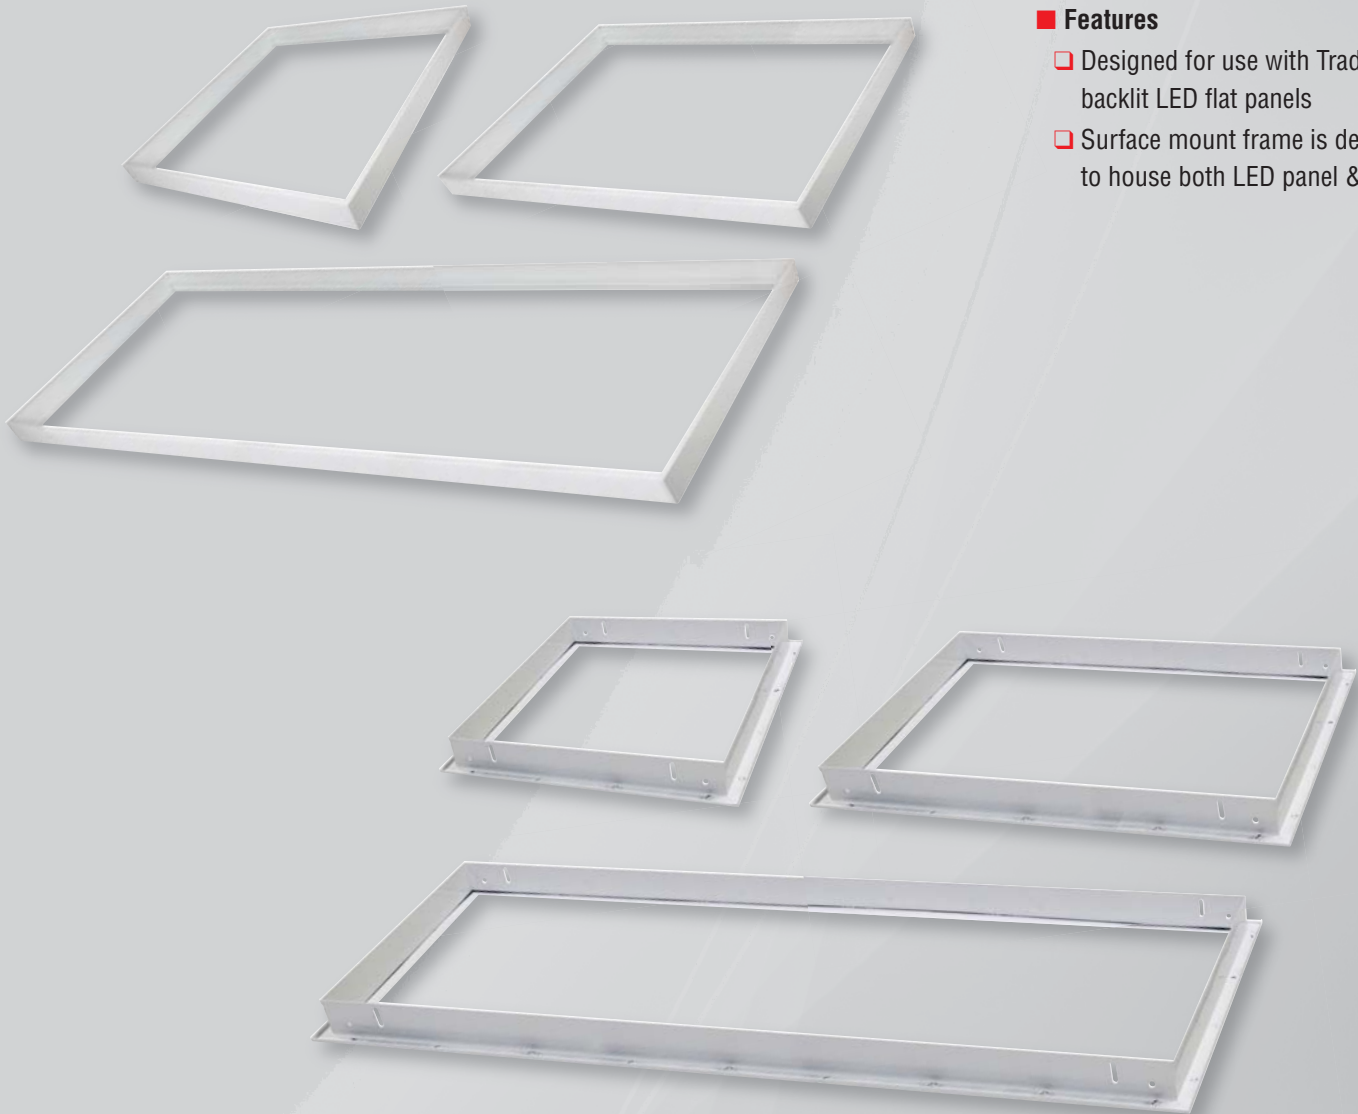

### ■ Features

- ❑ Designed for use with Tradesave backlit LED flat panels
- ❑ Surface mount frame is designed to house both LED panel & driver

Part No.	Description
TSFPBL3060SMF	LED Flat Panel Surface Mount Frame, to Suit 295 x 595mm
TSFPBL6060SMF	LED Flat Panel Surface Mount Frame, to Suit 595 x 595mm
TSFPBL30120SMF	LED Flat Panel Surface Mount Frame, to Suit 295 x 1195mm

Part No.	Description
TSFP3060RPF	LED Flat Panel Recess Plaster Frame to Suit 295 x 595mm
TSFP6060RPF	LED Flat Panel Recess Plaster Frame to Suit 595 x 595mm
TSFP30120RPF	LED Flat Panel Recess Plaster Frame to Suit 295 x 1195mm