

TRADE\$AVE

Backlit LED Flat Panel



Features





- PMMA diffuser
- Uniform light effect with optic lens
- Integrated sheet metal design provides excellent thermal management
- Slide switch function for colour temperature change
- Constant current driver
- 0.6m flex & plug
- Operating temp: -20°C to +45°C
- IP40 rated


Dimming Options (Driver Part# TSDRFP)

- Trailing & leading edge
- Universal

Installation Options

- Pendant
- Recessed

CERTIFICATION	IP RATING	DIMMABLE
		
COLOUR CHANGE	BOX CTN QTY	
	1 5	

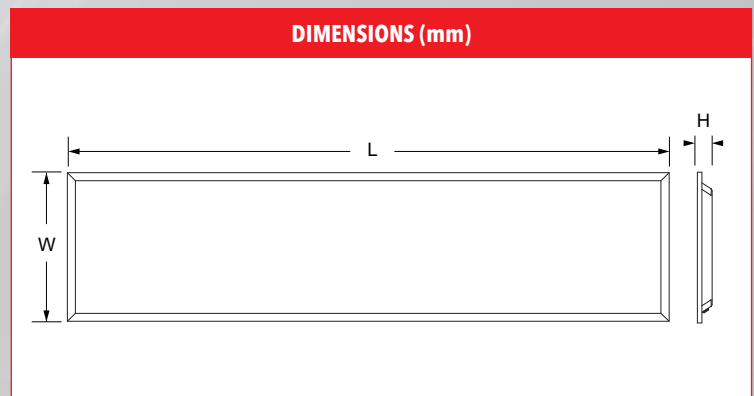

Part No.	Voltage AC	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (W x L x H)mm
TSFPBL30120TRI	200-240V	36W	0.9	3000K-4000K-5700K	80	3240-3600	120°	50,000	White	295 x 1195 x 28

 **1300 555 586**
 **repelec.com.au**

rep ELEC
TRADE SOLUTIONS

 
  **@RepelecAU**