


INFRARED MOTION SENSOR

NEW

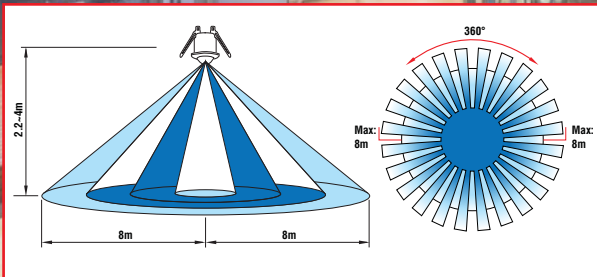

SPECIFICATIONS

- Voltage: 220-240V/AC 50Hz
- Rated Load: 1200W Max. Incandescent
1200W Max. Tungsten
300W Max. LED
- Auto Off Time Adjustment: Up to 10sec ~ 7mins
±2mins
- Lux Adjustment: <3 Lux ~ 2000 Lux
- Detection Range: Up to 16m at
2.2 ~ 4m height
- Detection Angle: 360 degrees
- Operating Temp: -20°C ~ +40°C
- Environmental Protection: IP20

Model No. 55-303

Manual Override

LED Compatible

360° Detection Range

IP20 Rated



MUST BE
INSTALLED
BY A LICENSED
ELECTRICIAN

WARNING! WARRANTY IS
VOID UNLESS INSTALLED BY
A LICENSED ELECTRICIAN.

INFRARED MOTION SENSOR

NEW



Model No. 55-305

SPECIFICATIONS

- Voltage: 220-240V/AC 50Hz
- Rated Load: 800W Max. Incandescent
800W Max. Tungsten
200W Max. LED
- Auto Off Time Adjustment: Up to 8sec ~ 7mins
±2mins
- Lux Adjustment: <3 Lux ~2000 Lux
- Detection Range: Up to 6m at
2.2 ~ 4m height
- Detection Angle: 360 degrees
- Operating Temp: -20°C ~ +40°C
- Environmental Protection: IP20

Manual Override

LED Compatible

360° Detection Range

IP20 Rated



WARNING! WARRANTY IS VOID UNLESS INSTALLED BY A LICENSED ELECTRICIAN.

INFRARED MOTION SENSOR

NEW



Model No. **55-306**

SPECIFICATIONS

- Voltage: 220-240V/AC 50Hz
- Rated Load: 1200W Max. Incandescent
1200W Max. Tungsten
300W Max. LED
- Auto Off Time Adjustment: Up to 10sec ~ 7mins
±2mins
- Lux Adjustment: <3 Lux ~2000 Lux
- Detection Range: Up to 6m at
2.5 ~ 3.5m height
- Detection Angle: 360 degrees
- Operating Temp: -20°C ~ +40°C
- Environmental Protection: IP20

Manual Override

LED Compatible

360° Detection Range

IP20 Rated



WARNING! WARRANTY IS VOID UNLESS INSTALLED BY A LICENSED ELECTRICIAN.

1300 555 586
repelec.com.au

rep **ELEC**
TRADE SOLUTIONS



@RepelecAU

INFRARED MOTION SENSOR

NEW



SPECIFICATIONS

• Voltage:	220-240V/AC 50Hz
• Rated Load:	2000W Max. Incandescent 2000W Max. Tungsten 1000W Max. LED
• Auto Off Time : Adjustment	Up to 10sec ~ 7mins ±2mins
• Lux Adjustment:	<3 Lux ~ 2000 Lux
• Meter Adjustment:	Adjustable from approx 2m to 16m at height of 2.2 to 4m
• Detection Range:	Up to 16m at 2.2 ~ 4m height
• Detection Angle:	360 degrees
• Operating Temp:	-20°C ~ +40°C
• Environmental Protection:	IP20

Model No. **55-307**

Manual Override

LED Compatible

360° Detection Range

IP20 Rated



WARNING! WARRANTY IS VOID UNLESS INSTALLED BY A LICENSED ELECTRICIAN.