

UNI-LOCK



THE SPECIFICS

The range consists of a pre-determined length of wire from 1 metre to 10 metres with a choice of Safe Working Loads:

- G 10kg (Gas Nail / Screw)
- S 50kg SWL

The system consists of wire and zip-clip with a right angle bracket termination.

THE APPLICATIONS

Suitable for:




- Concrete Slab
- Metal decking and other steel structures
- Wooden structures

THE TECHNICAL INFORMATION

- Key free release system
- Suitable for both plug and screw and shot fire applications
- Tear drop shape allows for wire to rotate through 180° in the bracket for angled applications
- Wire rotation reduces pressure on the nail when service is not directly below anchor point
- Trivalent zinc and clear galvanised
- Fix with:
 - » Wood screw
 - » Plug and screw
 - » Concrete screw
 - » Tek screw
 - » Gas/Pat nail
- Suspension can be inverted
- High tensile galvanised wire 1960 N/mm² grade 7 x 7 construction
- BSEN 12385 Standard

THE INSTALLATION

- For timber applications, pre-drill timber and use a screw to fix through the bracket
- For steel and concrete applications use self tapping fixing or a gas nailer with a suitable nail
- Pass the wire through the zip-clip in the direction of the arrow
- Pass through or around your required suspension and back through the zip-clip leaving 15cm of wire protruding
- Always confirm engagement of the zip-clip on the wire by pushing the pin in the opposite direction to the arrows indicated

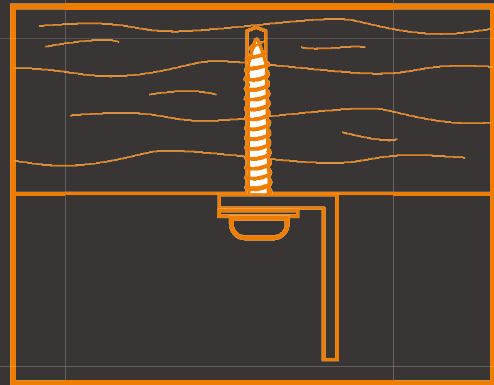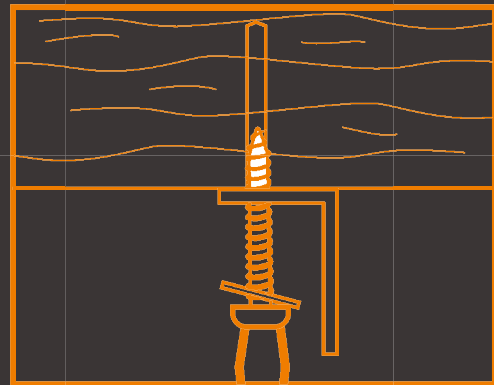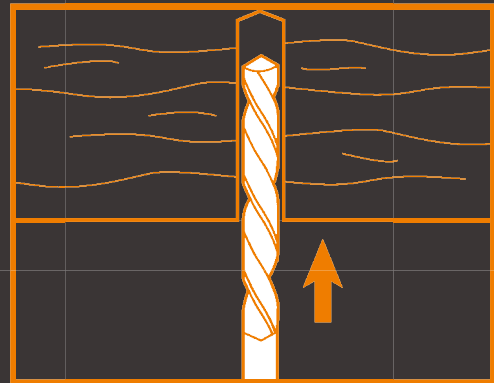

THE RANGE

The system consists of wire and zip-clip with a right angle bracket termination.



UNI-LOCK



PRODUCT CODE	DESCRIPTION	SWL	PACK QTY.
ULG1	1 Mtr angle bracket suspension system	10kg	10
ULG2	2 Mtr angle bracket suspension system	10kg	10
ULG3	3 Mtr angle bracket suspension system	10kg	10
ULG4	4 Mtr angle bracket suspension system	10kg	10
ULG5	5 Mtr angle bracket suspension system	10kg	10
ULG10	10 Mtr angle bracket suspension system	10kg	10
ULS1	1 Mtr angle bracket suspension system	50kg	10
ULS2	2 Mtr angle bracket suspension system	50kg	10
ULS3	3 Mtr angle bracket suspension system	50kg	10
ULS4	4 Mtr angle bracket suspension system	50kg	10
ULS5	5 Mtr angle bracket suspension system	50kg	10
ULS10	10 Mtr angle bracket suspension system	50kg	10

Not all sizes in stock.

BRACKET SIZES ALSO AVAILABLE:

IMAGE	PRODUCT CODE	DESCRIPTION
	HCB2	90 Degree bracket with 7.0mm and 5.0mm hole, 1.3mm gauge suitable for S wire
	HCB3	90 Degree bracket with 6.5mm holes, 2.0mm gauge suitable for Y wire

HCB bracket available on request.

